

MOTION OF THE BALLS, SLIDING FRICTION, AND INTERNAL LOAD DISTRIBUTION IN A HIGH-SPEED BALL BEARING SUBJECTED TO A COMBINED RADIAL, THRUST, AND MOMENT LOAD

Mário Ricci

DMC/INPE, Av. dos Astronautas, 1758, São José dos Campos, Brasil, marioesarricci@uol.com.br

Abstract: A numerical procedure for determining the motion of the balls, sliding friction and internal loading distribution computation in a high-speed, single-row, angular-contact ball bearing, subjected to a known combined radial, thrust and moment load, which must be applied to the inner ring center of mass, is presented. For each step of the procedure it is required the iterative solution of $9Z + 3$ simultaneous non-linear equations – where Z is the number of the balls – to yield exact solution for contact angles, ball attitude angles, rolling radii, normal contact deformations and axial, radial, and angular deflections of the inner ring with respect the outer ring.

Keywords: ball, bearing, high-speed, load, numerical, method

1 Introduction

Ball and roller bearings, generically called *rolling bearings*, are commonly used machine elements. They are employed to permit rotary motions of, or about, shafts in simple commercial devices such as bicycles, roller skates, and electric motors. They are also used in complex engineering mechanisms such as aircraft gas turbines, rolling mills, dental drills, gyroscopes, and power transmissions.

The standardized forms of ball or roller bearings permit rotary motion between two machine elements and always include a complement of ball or rollers that maintain the shaft and a usually stationary supporting structure, frequently called *housing*, in a radially or axially spaced-apart relationship. Usually, a bearing may be obtained as a unit, which includes two steel rings each of which has a hardened raceway on which hardened balls or rollers roll. The balls or rollers, also called *rolling elements*, are usually held in an angularly spaced relationship by a *cage*, also called a *separator* or *retainer*.

There are many different kinds of rolling bearings. This work is concerned with *single-row angular-contact ball bearings* - see Fig. (1) - that are designed to support combined radial and thrust loads or heavy thrust loads depending on the *contact angle* magnitude. The bearings having large contact angle can support heavier thrust loads. Figure (1) shows bearings having small and large contact angles. The bearings generally have groove curvature radii in the range of 52-53% of the ball diameter. The contact angle does not usually exceed 40° .

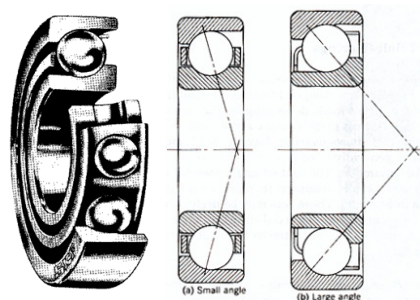


Figure 1. Angular-contact ball bearing

This work is devoted to study of internal load distribution in a *high-speed* angular-contact ball bearing. Several researchers have studied the subject of internal load distribution in a *statically loaded* angular-contact ball bearing as, for example, Stribeck (1907), Sjövall (1933), Jones (1946), Rumbarger (1962), Ricci (2009), and Ricci (2010). The methods developed by them to calculate distribution of load among the balls and rollers of rolling bearings can be used in most bearing applications because rotational speeds are usually slow to moderate. Under these speed conditions, the effects of rolling element centrifugal forces and gyroscopic moments are negligible. At high speeds of rotation these body forces become significant, tending to alter contact angles and clearance. Thus, they can affect the static load distribution to a great extension.

Harris (2001) described methods for internal loading distribution in statically loaded bearings addressing pure radial; pure thrust (centric and eccentric loads); combined radial and thrust load, which uses radial and thrust

integrals introduced by Sjöväll; and for ball bearings under combined radial, thrust, and moment load, initially due to Jones.

The great contribution to the study of ball motion, sliding friction and internal load distribution in a *high-speed* angular-contact ball bearing must be credited to A. B. Jones (Jones, 1959), (Jones, 1960). This work has revisited the Jones works, in some cases revising them and attaching improvements under the yoke of critical analysis, in other cases introducing new expressions for more realistic equilibrium conditions. Then, particularly, in this work, a numerical procedure for motion of the balls, sliding friction and internal loading distribution computation in a high-speed, single-row, angular-contact ball bearing, subjected to a known combined radial, thrust and moment load, which must be applied to the inner ring center of mass, is presented. For each step of the procedure it is required the iterative solution of $9Z + 3$ simultaneous non-linear equations – where Z is the number of the balls – to yield exact solution for contact angles, ball attitude angles, rolling radii, normal contact deformations and axial, radial, and angular deflections of the inner ring with respect the outer ring.

2 Mathematical Model

Having defined in other works analytical expressions for geometry of bearings and the contact stress and deformations for a given ball or roller-raceway contact (point or line loading) in terms of load (see, e.g., Harris, 2001) it is possible to consider how the bearing load is distributed among the rolling elements. In this section a specific load distribution consisting of a combined radial, thrust, and moment load, which must be applied to the center of mass of the inner ring of a high speed ball bearing, is considered.

Figure 2 shows the displacements of an inner ring related to the outer ring due to a generalized loading system including radial, axial, and moment loads. Figure 3 shows the relative angular position of each ball in the bearing.

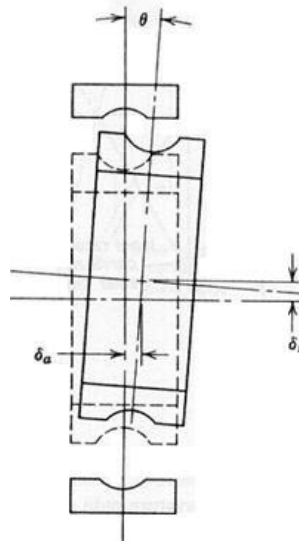


Figure 2. Displacements of an inner ring (outer ring fixed) due to combined radial, axial, and moment loading.

Let a ball bearing with Z balls, each with diameter D , symmetrically distributed about a pitch circle according to Fig. 3, to be subjected to a combined radial, thrust, and moment load applied to the inner ring's center of mass. Then, a *relative axial displacement*, δ_a , a *relative angular displacement*, θ , and a *relative radial displacement*, δ_r , between the inner and outer ring raceways may be expected according Fig. 2. Let $\psi = 0$ to be the angular position of the maximum loaded ball.

Under zero load the centers of raceway groove curvature radii are separated by a distance A given by

$$A = (f_o + f_i - 1)D, \quad (1)$$

in which f_o, f_i are the conformities for outer and inner raceways, respectively.

Under an applied static load, the distance s between centers will increase from A to A plus the amount of the contact deformation δ_i plus δ_o , as show by Fig. 4. The line of action between centers is collinear with A . If, however, a centrifugal force acts on the ball, then because the inner and outer raceway contact angles are

dissimilar, the line of action between raceway groove curvature radii centers is not collinear with A , but is discontinuous as indicated by Fig. 5. It is assumed in Fig. 5 that the outer raceway groove curvature center is fixed in space and the inner raceway groove curvature center moves relative to that fixed center. Moreover, the ball center shifts by virtue of the dissimilar contact angles.

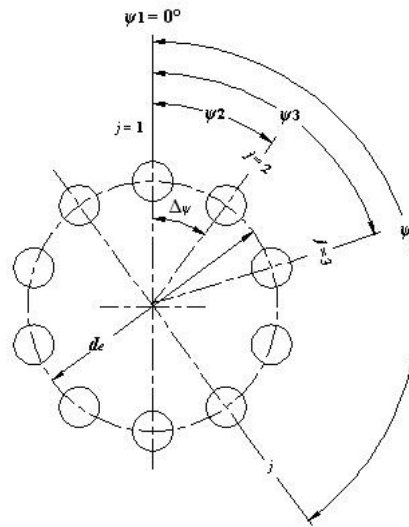


Figure 3. Ball angular positions in the radial plane that is perpendicular to the bearing's axis of rotation, $\Delta\psi = 2\pi/Z$, $\psi_j = 2\pi(j-1)/Z$, $j = 1 \dots Z$, in which Z is the number of balls.

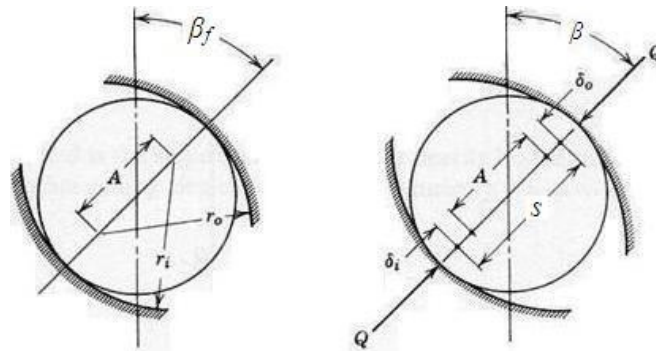


Figure 4. (a) Ball-raceway contact before loading; (b) Ball-raceway contact under load.

In accordance with Fig. 5 the distance between the fixed outer raceway groove curvature center and the final position of the ball center at any ball location j is

$$\Delta_{o_j} = r_o - \frac{D}{2} + \delta_{o_j} \quad (2)$$

Since $r_o = f_o D$,

$$\Delta_{o_j} = (f_o - 0.5)D + \delta_{o_j} \quad (3)$$

Similarly, the distance between the moving inner raceway groove curvature center and the final position of the ball center at any ball location j is

$$\Delta_{i_j} = (f_i - 0.5)D + \delta_{i_j} \quad (4)$$

in which δ_{o_j} and δ_{i_j} are the normal contact deformations at the outer and inner raceway contacts, respectively.

In accordance with the relative axial displacement between inner and outer rings mass centers, δ_a , and the relative angular displacement θ , the axial distance between inner and outer raceway groove curvature centers at ball position j is

$$s_{xj} = A \sin \beta_f + \delta_a + \mathcal{R}_i \sin \theta \cos \psi_j, \quad (5)$$

in which

$$\mathcal{R}_i = \frac{1}{2} d_e + (f_i - \frac{1}{2}) D \cos \beta_f \quad (6)$$

is the radius to locus of inner raceway groove curvature centers, d_e is the unloaded pitch diameter, and β_f is the unloaded contact angle. Further, in accordance with the relative radial displacement between inner and outer rings mass centers, δ_r , and the relative angular displacement θ , the radial distance between inner and outer groove curvature centers at each ball location j is

$$s_{zj} = A \cos \beta_f + \delta_r \cos \psi_j - \mathcal{R}_i (1 - \cos \theta) \sqrt{\cos^2 \psi_j}. \quad (7)$$

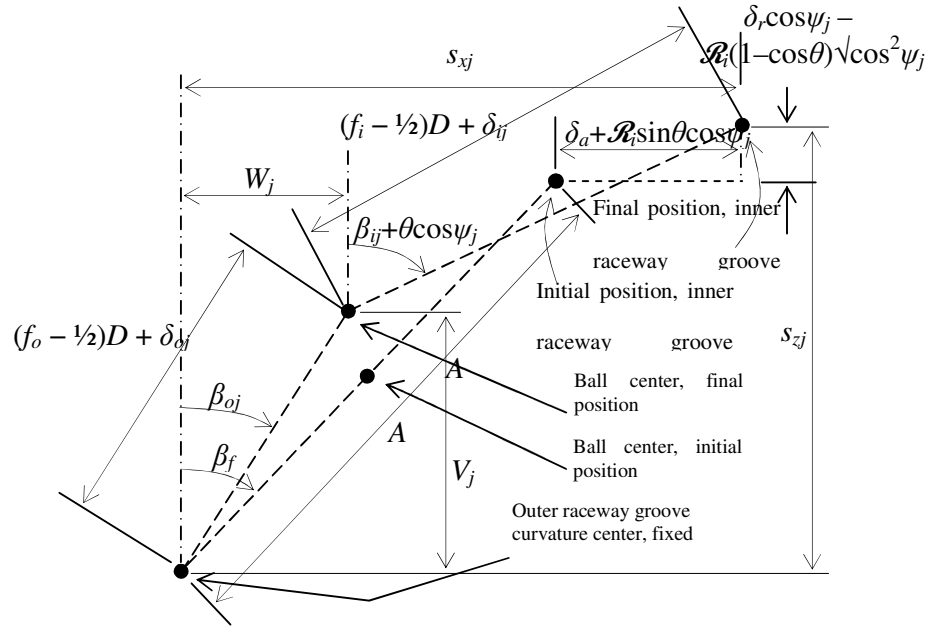


Figure 5. Positions of ball center and raceway groove curvature centers at angular position ψ_j with and without applied load.

If the iterative techniques of the Newton-Raphson method is be used to solve the associated nonlinear equations, the angles β_{oj} and β_{ij} are best stated in terms of the co-ordinates V and W , in Fig. 5. Then

$$\sin \beta_{oj} = \frac{W_j}{(f_o - 0.5)D + \delta_{oj}}, \quad (8)$$

$$\cos \beta_{oj} = \frac{V_j}{(f_o - 0.5)D + \delta_{oj}}, \quad (9)$$

$$\sin(\beta_{ij} + \theta \cos \psi_j) = \frac{s_{xj} - W_j}{(f_i - 0.5)D + \delta_{ij}}, \quad (10)$$

$$\cos(\beta_{ij} + \theta \cos \psi_j) = \frac{s_{zj} - V_j}{(f_i - 0.5)D + \delta_{ij}}. \quad (11)$$

Similarly, the ball angular speed about its own center pitch and yaw angles, α_j and α'_j , are best stated in terms of the ball angular velocity components: ω_{xj} , ω_{yj} , and ω_{zj} . Then

$$\sin \alpha_j = \frac{\omega_{zj}}{\sqrt{\omega_{xj}^2 + \omega_{yj}^2 + \omega_{zj}^2}}, \quad (12)$$

$$\cos \alpha_j = \frac{\sqrt{\omega_{xj}^2 + \omega_{yj}^2}}{\sqrt{\omega_{xj}^2 + \omega_{yj}^2 + \omega_{zj}^2}}, \quad (13)$$

$$\sin \alpha'_j = \frac{\omega_{yj}}{\sqrt{\omega_{xj}^2 + \omega_{yj}^2}}, \quad (14)$$

$$\cos \alpha'_j = \frac{\omega_{xj}}{\sqrt{\omega_{xj}^2 + \omega_{yj}^2}}. \quad (15)$$

Using the Pythagorean Theorem, it can be seen from Fig. 5 that

$$(\varepsilon_{zi} - V_j)^2 + (\varepsilon_{xi} - W_j)^2 - [(f_i - 0.5)D + \delta_{ij}]^2 = 0 = \varepsilon_1, \quad (16)$$

$$V_j^2 + W_j^2 - [(f_o - 0.5)D + \delta_{oj}]^2 = 0 = \varepsilon_2. \quad (17)$$

From (12)-(15)

$$\omega_{x'j}^2 + \omega_{y'j}^2 + \omega_{z'j}^2 - \omega_{Rj}^2 = 0 = \varepsilon_3. \quad (18)$$

For steady state operation of a ball bearing at high speed, the forces and moments acting on each ball are as shown by Fig. 6.

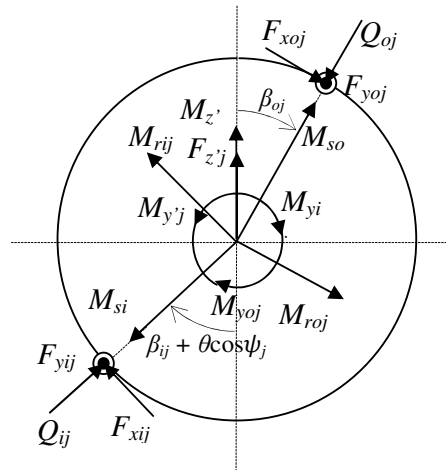


Figure 6. Ball loading at angular position ψ_j .

The normal ball loads are related to normal contact deformations as follows:

$$Q_{oj} = K_{oj} \delta_{oj}^{1.5}, \quad (19)$$

$$Q_{ij} = K_{ij} \delta_{ij}^{1.5}. \quad (20)$$

From Fig. 6 considering the three axes equilibrium forces:

$$Q_{ij} \sin(\beta_{ij} + \theta \cos \psi_j) - Q_{oj} \sin \beta_{oj} - F_{xij} \cos(\beta_{ij} + \theta \cos \psi_j) + F_{xoj} \cos \beta_{oj} = 0, \quad (21)$$

$$Q_{ij} \cos(\beta_{ij} + \theta \cos \psi_j) - Q_{oj} \cos \beta_{oj} + F_{xij} \sin(\beta_{ij} + \theta \cos \psi_j) - F_{xoj} \sin \beta_{oj} + F_{z'j} = 0, \quad (22)$$

$$F_{y'oj} + F_{y'ij} = 0 = \varepsilon_4. \quad (23)$$

Substituting (8)-(11) and (19)-(20) into (21)-(22) yields

$$\frac{F_{xoj} V_j - K_{oj} \delta_{oj}^{1.5} W_j}{(f_o - 0.5)D + \delta_{oj}} + \frac{K_{ij} \delta_{ij}^{1.5} (\varepsilon_{xi} - W_j) - F_{xij} (\varepsilon_{zi} - V_j)}{(f_i - 0.5)D + \delta_{ij}} = 0 = \varepsilon_5, \quad (24)$$

$$\frac{K_{oj} \delta_{oj}^{1.5} V_j + F_{xoj} W_j}{(f_o - 0.5)D + \delta_{oj}} - \frac{K_{ij} \delta_{ij}^{1.5} (\varepsilon_{zi} - V_j) + F_{xij} (\varepsilon_{xi} - W_j)}{(f_i - 0.5)D + \delta_{ij}} - F_{z'j} = 0 = \varepsilon_6. \quad (25)$$

From Fig. 6 considering the three axes equilibrium moments:

$$-M_{zij} \sin(\beta_{ij} + \theta \cos \psi_j) + M_{z'oj} \sin \beta_{oj} - M_{Rij} \cos(\beta_{ij} + \theta \cos \psi_j) + M_{Roj} \cos \beta_{oj} = 0, \quad (26)$$

$$-M_{zij} \cos(\beta_{ij} + \theta \cos \psi_j) + M_{z'oj} \cos \beta_{oj} + M_{Rij} \sin(\beta_{ij} + \theta \cos \psi_j) - M_{Roj} \sin \beta_{oj} + M_{z'y} = 0. \quad (27)$$

$$M_{y'j} - M_{y'ij} - M_{y'oj} = 0 = \varepsilon_7. \quad (28)$$

Substituting (8)-(11) into (26)-(27) yields

$$\frac{M_{z'oj} V_j + M_{z'oj} W_j}{(f_o - 0.5)D + \delta_{oj}} - \frac{M_{zij} (\varepsilon_{xi} - W_j) + M_{Rij} (\varepsilon_{zi} - V_j)}{(f_i - 0.5)D + \delta_{ij}} = 0 = \varepsilon_7, \quad (29)$$

$$\frac{M_{z_{o_j}} V_j - M_{z_{o_j}} W_j}{(f_o - 0.5)D + \delta_{o_j}} - \frac{M_{z_{i_j}} (s_{z_j} - V_j) - M_{z_{i_j}} (s_{z_j} - W_j)}{(f_i - 0.5)D + \delta_{i_j}} + M_{z'j} = 0 = \epsilon_z. \quad (30)$$

The centrifugal force acting on the ball at angular position ψ_j is given by

$$F_{z'j} = \frac{1}{2} m d_{mj} \omega_{mj}^2, \quad (31)$$

in which m is the mass of ball,

$$d_{mj} = d_g + 2[V_j - (f_o - 1/2)D \cos \beta_f] \quad (32)$$

is the operational ball's pitch diameter at position j , and ω_{mj} is the absolute orbital speed of the ball about of the bearing axis.

Substituting the identity $\omega_{mj}^2 = (\omega_{mj}/\omega)^2 \omega^2$ in (31), the following equation for centrifugal force is obtained

$$F_{z'j} = \frac{1}{2} m \omega^2 \bar{d}_{mj} \left(\frac{\omega_{mj}}{\omega} \right)^2, \quad (33)$$

in which ω is the absolute angular velocity of the rotating ring.

For the outer race to be stationary $\omega_{mj} = -\omega_{oj}$, $\omega = \omega_{ij} + \omega_{mj}$,

$$\frac{\omega_{mj}}{\omega} = \frac{1}{1 + \frac{r'_{i_j} \left\{ \frac{\bar{d}_{mj}}{2} [(f_o - 0.5)D + \delta_{o_j}] + r'_{o_j} V_j \right\} [\omega_{i_j} (s_{z_j} - V_j) + \omega_{z'j} (s_{z_j} - W_j)]}{r'_{o_j} \left\{ \frac{\bar{d}_{mj}}{2} [(f_i - 0.5)D + \delta_{i_j}] - r'_{i_j} (s_{z_j} - V_j) \right\} (\omega_{z'j} V_j + \omega_{z'j} W_j)}} \quad (34)$$

and

$$\frac{\omega_{Rj}}{\omega} = \frac{-\sqrt{\omega_{i_j}^2 + \omega_{y_j}^2 + \omega_{z'j}^2}}{r'_{o_j} (\omega_{z'j} V_j + \omega_{z'j} W_j) + \frac{\bar{d}_{mj}}{2} [(f_o - 0.5)D + \delta_{o_j}] + r'_{o_j} V_j} \frac{r'_{i_j} [\omega_{i_j} (s_{z_j} - V_j) + \omega_{z'j} (s_{z_j} - W_j)]}{\frac{\bar{d}_{mj}}{2} [(f_i - 0.5)D + \delta_{i_j}] - r'_{i_j} (s_{z_j} - V_j)}, \quad \omega_{Rj} = \sqrt{\omega_{i_j}^2 + \omega_{y_j}^2 + \omega_{z'j}^2}, \quad (35)$$

in which ω_{ij} , ω_{oj} are the angular velocities about the bearing axis of the inner and outer rings with respect to the ball at position j , and r'_{i_j} , r'_{o_j} are the inner and outer rolling radii.

Likewise, for the inner race to be stationary $\omega_{mj} = -\omega_{ij}$, $\omega = \omega_{oj} + \omega_{mj}$,

$$\frac{\omega_{mj}}{\omega} = \frac{1}{1 + \frac{r'_{o_j} \left\{ \frac{\bar{d}_{mj}}{2} [(f_i - 0.5)D + \delta_{i_j}] - r'_{i_j} (s_{z_j} - V_j) \right\} (\omega_{z'j} V_j + \omega_{z'j} W_j)}{r'_{i_j} \left\{ \frac{\bar{d}_{mj}}{2} [(f_o - 0.5)D + \delta_{o_j}] + r'_{o_j} V_j \right\} [\omega_{i_j} (s_{z_j} - V_j) + \omega_{z'j} (s_{z_j} - W_j)]}} \quad (36)$$

and

$$\frac{\omega_{Rj}}{\omega} = \frac{\sqrt{\omega_{i_j}^2 + \omega_{y_j}^2 + \omega_{z'j}^2}}{r'_{o_j} (\omega_{z'j} V_j + \omega_{z'j} W_j) + \frac{\bar{d}_{mj}}{2} [(f_o - 0.5)D + \delta_{o_j}] + r'_{o_j} V_j} \frac{r'_{i_j} [\omega_{i_j} (s_{z_j} - V_j) + \omega_{z'j} (s_{z_j} - W_j)]}{\frac{\bar{d}_{mj}}{2} [(f_i - 0.5)D + \delta_{i_j}] - r'_{i_j} (s_{z_j} - V_j)} \quad (37)$$

Similarly, the gyroscopic moments acting on the ball at angular position ψ_j are given by

$$M_{y'j} = J \omega^2 \left(\frac{\omega_{Rj}}{\omega} \right) \left(\frac{\omega_{mj}}{\omega} \right) \frac{\omega_{z'j}}{\sqrt{\omega_{i_j}^2 + \omega_{y_j}^2 + \omega_{z'j}^2}}, \quad (38)$$

and

$$M_{z'j} = -J \omega^2 \left(\frac{\omega_{Rj}}{\omega} \right) \left(\frac{\omega_{mj}}{\omega} \right) \frac{\omega_{y'j}}{\sqrt{\omega_{i_j}^2 + \omega_{y_j}^2 + \omega_{z'j}^2}}, \quad (39)$$

in which J is the ball's mass moment of inertia.

The friction forces due to sliding in the x and y -directions of inner and outer ball-raceway elliptical contact areas are given by

$$F_{xij} = \frac{3\mu R_i \delta_{ij}^{\frac{3}{2}}}{2\pi a_{ij} b_{ij}} \int_{-a_{ij}}^{a_{ij}} \int_{-b_{ij}}^{b_{ij}} \sqrt{\frac{1 - \frac{x_{ij}^2}{a_{ij}^2}}{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}}} \sqrt{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}} \sin \gamma_{ij} dy_{ij} dx_{ij}, \quad (40)$$

$$F_{xoj} = \frac{3\mu R_o \delta_{oj}^{\frac{3}{2}}}{2\pi a_{oj} b_{oj}} \int_{-a_{oj}}^{a_{oj}} \int_{-b_{oj}}^{b_{oj}} \sqrt{\frac{1 - \frac{x_{oj}^2}{a_{oj}^2}}{1 - \frac{x_{oj}^2}{a_{oj}^2} - \frac{y_{oj}^2}{b_{oj}^2}}} \sqrt{1 - \frac{x_{oj}^2}{a_{oj}^2} - \frac{y_{oj}^2}{b_{oj}^2}} \sin \gamma_{oj} dy_{oj} dx_{oj}, \quad (41)$$

$$F_{yij} = \frac{3\mu R_i \delta_{ij}^{\frac{3}{2}}}{2\pi a_{ij} b_{ij}} \int_{-a_{ij}}^{a_{ij}} \int_{-b_{ij}}^{b_{ij}} \sqrt{\frac{1 - \frac{x_{ij}^2}{a_{ij}^2}}{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}}} \sqrt{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}} \cos \gamma_{ij} dy_{ij} dx_{ij}, \quad (42)$$

$$F_{yoj} = \frac{3\mu R_o \delta_{oj}^{\frac{3}{2}}}{2\pi a_{oj} b_{oj}} \int_{-a_{oj}}^{a_{oj}} \int_{-b_{oj}}^{b_{oj}} \sqrt{\frac{1 - \frac{x_{oj}^2}{a_{oj}^2}}{1 - \frac{x_{oj}^2}{a_{oj}^2} - \frac{y_{oj}^2}{b_{oj}^2}}} \sqrt{1 - \frac{x_{oj}^2}{a_{oj}^2} - \frac{y_{oj}^2}{b_{oj}^2}} \cos \gamma_{oj} dy_{oj} dx_{oj}, \quad (43)$$

in which μ is the friction coefficient; a_{ij} , b_{ij} , a_{oj} , and b_{oj} are semimajor and semiminor-axes of inner and outer pressure ellipses; x_{ij} , y_{ij} , x_{oj} , y_{oj} are the co-ordinates of an element of area, $dA = dydx$, inside the contact ellipse, which has a resultant velocity of slip V of the race on the ball acting at the angle γ with respect to the y -direction, which are given by

$$\gamma_{ij} = \tan^{-1} \frac{V_{xij} - \omega_{xij} x_{ij}}{V_{yij} - \omega_{yij} y_{ij}}, \quad (44)$$

$$\gamma_{oj} = \tan^{-1} \frac{V_{xoj} - \omega_{xoj} x_{oj}}{V_{yoj} - \omega_{yoj} y_{oj}}. \quad (45)$$

V_{xij} , V_{xoj} , V_{yij} , V_{yoj} , ω_{xij} , and ω_{xoj} are the relative linear and angular slip velocities of inner and outer races with respect to the ball located at position j . The terms involving these velocities for use in (44) and (45) are given by

$$\frac{V_{xij}}{\omega_{xij}} = \frac{\left(\sqrt{R_i^2 - x_{ij}^2} - \sqrt{R_i^2 - a_{ij}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{ij}^2} \right) \left((f_1 - 0.5)D + \delta_{ij} - \frac{r'_{ij}}{2} (s_{2j} - V_j) \right) \omega_{y'j}}{\omega_{x'j} (s_{2j} - W_j) - \omega_{z'j} \left(s_{2j} - V_j - \frac{r'_{ij}}{2} [(f_1 - 0.5)D + \delta_{ij}] \right)}, \quad (46)$$

$$\frac{V_{yij}}{\omega_{yij}} = \frac{\left(\sqrt{R_i^2 - x_{ij}^2} - \sqrt{R_i^2 - a_{ij}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{ij}^2} - r'_{ij} \right) \left[\omega_{x'j} (s_{2j} - V_j) + \omega_{z'j} (s_{2j} - W_j) \right]}{\omega_{x'j} (s_{2j} - W_j) - \omega_{z'j} \left(s_{2j} - V_j - \frac{r'_{ij}}{2} [(f_1 - 0.5)D + \delta_{ij}] \right)}, \quad (47)$$

$$\frac{V_{xoj}}{\omega_{xoj}} = \frac{- \left(\sqrt{R_o^2 - x_{oj}^2} - \sqrt{R_o^2 - a_{oj}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{oj}^2} \right) \left((f_o - 0.5)D + \delta_{oj} + \frac{r'_{oj}}{2} V_j \right) \omega_{y'j}}{\omega_{x'j} W_j - \omega_{z'j} \left(V_j + \frac{r'_{oj}}{2} [(f_o - 0.5)D + \delta_{oj}] \right)}, \quad (48)$$

$$\frac{V_{yoj}}{\omega_{yoj}} = \frac{\left(\sqrt{R_o^2 - x_{oj}^2} - \sqrt{R_o^2 - a_{oj}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{oj}^2} - r'_{oj} \right) \left(\omega_{x'j} V_j + \omega_{z'j} W_j \right)}{\omega_{x'j} W_j - \omega_{z'j} \left(V_j + \frac{r'_{oj}}{2} [(f_o - 0.5)D + \delta_{oj}] \right)}, \quad (49)$$

in which R_i and R_o are the curvature radii of deformed surfaces, given by

$$R_i = \frac{2f_i D}{2f_i + 1}, \quad (50)$$

$$R_o = \frac{2f_o D}{2f_o + 1}. \quad (51)$$

The total frictional moments of the friction forces about the normal at the center of the contact ellipse are

$$M_{xij} = \frac{\mu K_{ij} \delta_{ij}^1 \bar{\epsilon}}{2\pi a_{ij} b_{ij}} \int_{-a_{ij}}^{a_{ij}} \int_{-b_{ij}}^{b_{ij}} \sqrt{\frac{1-x_{ij}^2}{a_{ij}^2}} \sqrt{x_{ij}^2 + y_{ij}^2} \sqrt{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}} \cos\left(\gamma_{ij} - \tan^{-1} \frac{y_{ij}}{x_{ij}}\right) dy_{ij} dx_{ij}, \quad (52)$$

$$M_{yij} = \frac{\mu K_{ij} \delta_{ij}^1 \bar{\epsilon}}{2\pi a_{ij} b_{ij}} \int_{-a_{ij}}^{a_{ij}} \int_{-b_{ij}}^{b_{ij}} \sqrt{\frac{1-x_{ij}^2}{a_{ij}^2}} \sqrt{x_{ij}^2 + y_{ij}^2} \sqrt{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}} \sin\left(\gamma_{ij} - \tan^{-1} \frac{y_{ij}}{x_{ij}}\right) dy_{ij} dx_{ij}. \quad (53)$$

The moments of the friction forces about the y' -axis are

$$M_{yij} = \frac{\mu K_{ij} \delta_{ij}^1 \bar{\epsilon}}{2\pi a_{ij} b_{ij}} \int_{-a_{ij}}^{a_{ij}} \int_{-b_{ij}}^{b_{ij}} \sqrt{\frac{1-x_{ij}^2}{a_{ij}^2}} \left(\sqrt{R_{ij}^2 - x_{ij}^2} - \sqrt{R_{ij}^2 - a_{ij}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{ij}^2} \right) \sqrt{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}} \sin\gamma_{ij} dy_{ij} dx_{ij}, \quad (54)$$

$$M_{y'oj} = \frac{\mu K_{oj} \delta_{oj}^1 \bar{\epsilon}}{2\pi a_{oj} b_{oj}} \int_{-a_{oj}}^{a_{oj}} \int_{-b_{oj}}^{b_{oj}} \sqrt{\frac{1-x_{oj}^2}{a_{oj}^2}} \left(\sqrt{R_{oj}^2 - x_{oj}^2} - \sqrt{R_{oj}^2 - a_{oj}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{oj}^2} \right) \sqrt{1 - \frac{x_{oj}^2}{a_{oj}^2} - \frac{y_{oj}^2}{b_{oj}^2}} \sin\gamma_{oj} dy_{oj} dx_{oj}. \quad (55)$$

The frictional moments about an axis through the ball center perpendicular to the line defining the contact angle, which line lies in the $x'z'$ -plane, are

$$M_{Rij} = \frac{\mu K_{ij} \delta_{ij}^1 \bar{\epsilon}}{2\pi a_{ij} b_{ij}} \int_{-a_{ij}}^{a_{ij}} \int_{-b_{ij}}^{b_{ij}} \sqrt{\frac{1-x_{ij}^2}{a_{ij}^2}} \left(\sqrt{R_{ij}^2 - x_{ij}^2} - \sqrt{R_{ij}^2 - a_{ij}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{ij}^2} \right) \sqrt{1 - \frac{x_{ij}^2}{a_{ij}^2} - \frac{y_{ij}^2}{b_{ij}^2}} \cos\gamma_{ij} dy_{ij} dx_{ij}, \quad (56)$$

$$M_{R'oj} = \frac{\mu K_{oj} \delta_{oj}^1 \bar{\epsilon}}{2\pi a_{oj} b_{oj}} \int_{-a_{oj}}^{a_{oj}} \int_{-b_{oj}}^{b_{oj}} \sqrt{\frac{1-x_{oj}^2}{a_{oj}^2}} \left(\sqrt{R_{oj}^2 - x_{oj}^2} - \sqrt{R_{oj}^2 - a_{oj}^2} + \sqrt{\left(\frac{D}{2}\right)^2 - a_{oj}^2} \right) \sqrt{1 - \frac{x_{oj}^2}{a_{oj}^2} - \frac{y_{oj}^2}{b_{oj}^2}} \cos\gamma_{oj} dy_{oj} dx_{oj}. \quad (57)$$

Equations (16)-(18), (23)-(25) and (28)-(30) may be solved simultaneously for V_j , W_j , δ_{oj} , δ_{ij} , r'_{oj} , r'_{ij} , ω_{xj} , ω_{yj} , and ω_{zj} at each ball angular location once values for δ_a , δ_r , and θ are assumed. The afore-mentioned Newton-Raphson method shall be used for solution of the simultaneous nonlinear equations.

Since K_{oj} and K_{ij} are functions of contact angle, equations (8)-(11) may be used to establish K_{oj} and K_{ij} values during the iteration.

To find the values of δ_a , δ_r , and θ , it remains to establish the equilibrium conditions of forces and moments about the inner ring center of mass, as shown by Fig. 7, which are

$$F_a - \sum_{j=1}^Z \left[\frac{K_{ij} \delta_{ij}^1 \bar{\epsilon} (\epsilon_{oj} - W_j) - F_{xij} (\epsilon_{zj} - V_j)}{(f_i - 0.8) D + \delta_{ij}} \right] = 0, \quad (58)$$

$$F_r - \sum_{j=1}^Z \left[\frac{K_{ij} \delta_{ij}^1 \bar{\epsilon} (\epsilon_{zj} - V_j) + F_{xij} (\epsilon_{oj} - W_j)}{(f_i - 0.8) D + \delta_{ij}} \right] \cos\psi_j = 0, \quad (59)$$

$$M - \sum_{j=1}^Z \{ \mathcal{R}_i [K_{ij} \delta_{ij}^1 \bar{\epsilon} \sin\beta_{ij} - F_{xij} (\cos\beta_{ij} - \eta / \mathcal{R}_i)] \cos\psi_j - (F_{yij} \eta \sin\beta_{ij} - M_{xij} \cos\beta_{ij}) \sin\psi_j \} = 0, \quad (60)$$

in which F_a , F_r , and M are external forces and moment applied to the inner ring center of mass.

Having computed values of V_j , W_j , δ_{oj} , δ_{ij} , r'_{oj} , r'_{ij} , ω_{xj} , ω_{yj} , and ω_{zj} at each ball angular location and knowing F_a , F_r and M as input conditions, the values of δ_a , δ_r , and θ may be computed by equations (58)-(60). After obtaining the primary unknown quantities δ_a , δ_r , and θ , it is necessary to repeat the calculation of V_j , W_j , δ_{oj} , δ_{ij} , r'_{oj} , r'_{ij} , ω_{xj} , ω_{yj} , and ω_{zj} , until compatible values of primary unknown quantities δ_a , δ_r , and θ are obtained.

3 Conclusion

The works of A. B. Jones (Jones, 1959), (Jones, 1960), were revisited and some improvements are being proposed, as is the case of introducing new expressions for equilibrium conditions. A numerical procedure for determining the motion of the balls, sliding friction and internal loading distribution computation in a high-

speed, single-row, angular-contact ball bearing, subjected to a known combined radial, thrust and moment load, which must be applied to the inner ring center of mass, was presented. For each step of the procedure it is required the iterative solution of $9Z + 3$ simultaneous non-linear equations – where Z is the number of the balls – to yield exact solution for contact angles, ball attitude angles, rolling radii, normal contact deformations and axial, radial, and angular deflections of the inner ring with respect the outer ring.

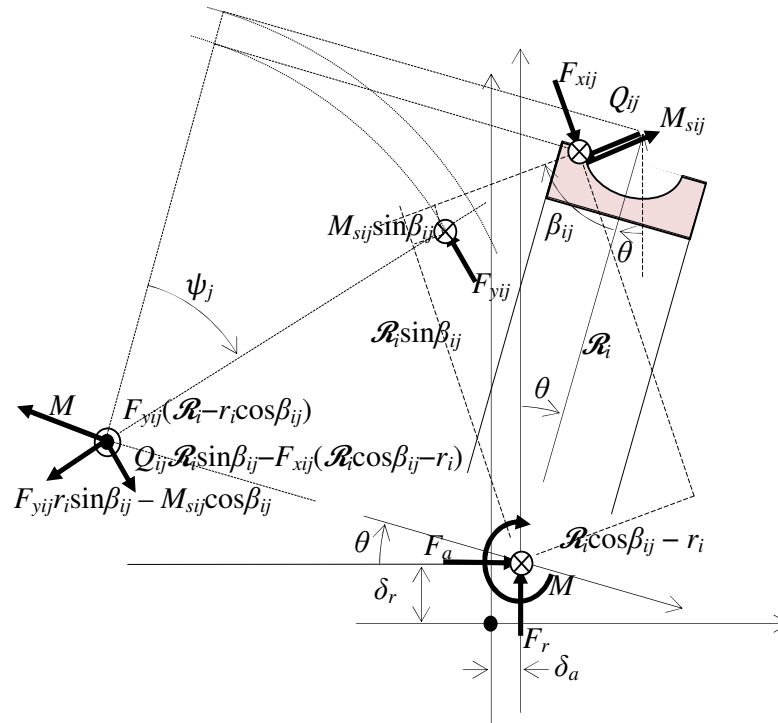


Figure 7. Forces and moments about the inner ring center of mass.

4 References

- Harris, T., Rolling Bearing Analysis, 4th ed., John Wiley & Sons Inc., New York, 2001.
- Jones, A., Analysis of Stresses and Deflections, New Departure Engineering Data, Bristol, Conn., 1946.
- Jones, A. B., Ball Motion and Sliding Friction in Ball Bearings, ASME Journal of Basic Engineering, Vol. 3, 1-12, 1959.
- Jones A. B., A General Theory for Elastically Constrained Ball and Radial Roller Bearings Under Arbitrary Load and Speed Conditions, J. Fluids Eng. 82(2), 309-320, 1960, doi:10.1115/1.3662587.
- Ricci, M. C., Ball bearings subjected to a variable eccentric thrust load, DINCON'09 Proceedings of the 8th Brazilian Conference on Dynamics, Control and Applications, May, 18-22, Bauru, Brazil, 2009. ISBN: 978-85-86883-45-3.
- Ricci, M. C., Internal loading distribution in statically loaded ball bearings, ICCCM09 1st International Conference on Computational Contact Mechanics, Program and Abstracts, p. 21-22, Sept. 16-18, Lecce, Italy, 2009.
- Ricci, M. C., Internal loading distribution in statically loaded ball bearings subjected to a combined radial and thrust load, 6th ICCSM Proceedings of the 6th International Congress of Croatian Society of Mechanics, Sept. 30 to Oct. 2, Dubrovnik, Croatia, 2009. ISBN 978-953-7539-11-5.
- Ricci, M. C., Internal loading distribution in statically loaded ball bearings subjected to a combined radial, thrust, and moment load, Proceedings of the 60th International Astronautical Congress, October, 12-16, Daejeon, South Korea, 2009. ISSN 1995-6258.
- Ricci, M. C., Internal loading distribution in statically loaded ball bearings subjected to an eccentric thrust load, Mathematical Problems in Engineering, 2009.
- Ricci, M. C., Internal loading distribution in statically loaded ball bearings subjected to a combined radial, thrust, and moment load, including the effects of temperature and fit, Proceedings of 11th Pan-American Congress of Applied Mechanics, January, 04-10, Foz do Iguaçu, Brazil, 2010.
- Rumbarger, J., "Thrust Bearings with Eccentric Loads," Mach. Des., Feb. 15, 1962.
- Sjoväll, H., "The Load Distribution within Ball and Roller Bearings under Given External Radial and Axial Load," Teknisk Tidskrift, Mek., h.9, 1933.
- Stribeck, R., "Ball Bearings for Various Loads," Trans. ASME 29, 420-463, 1907.